

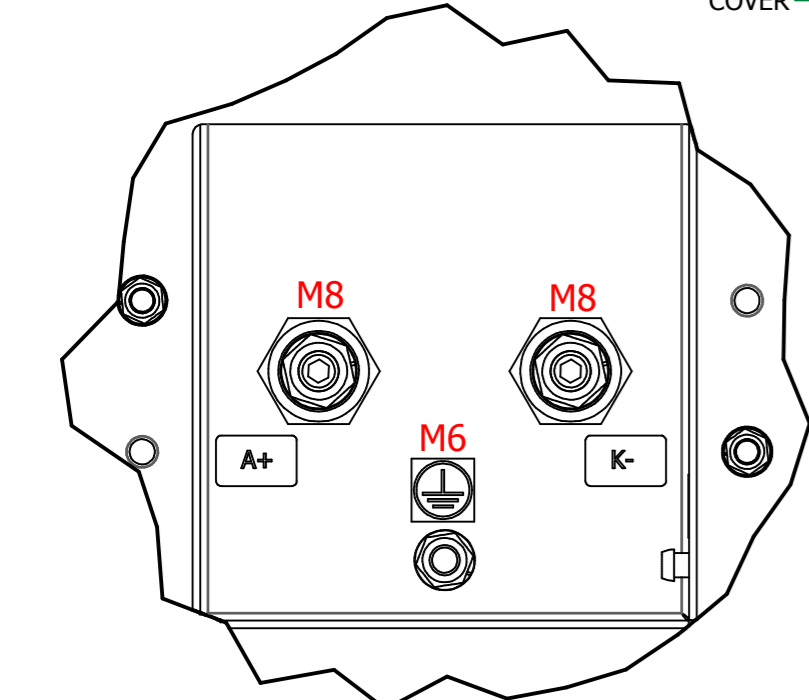
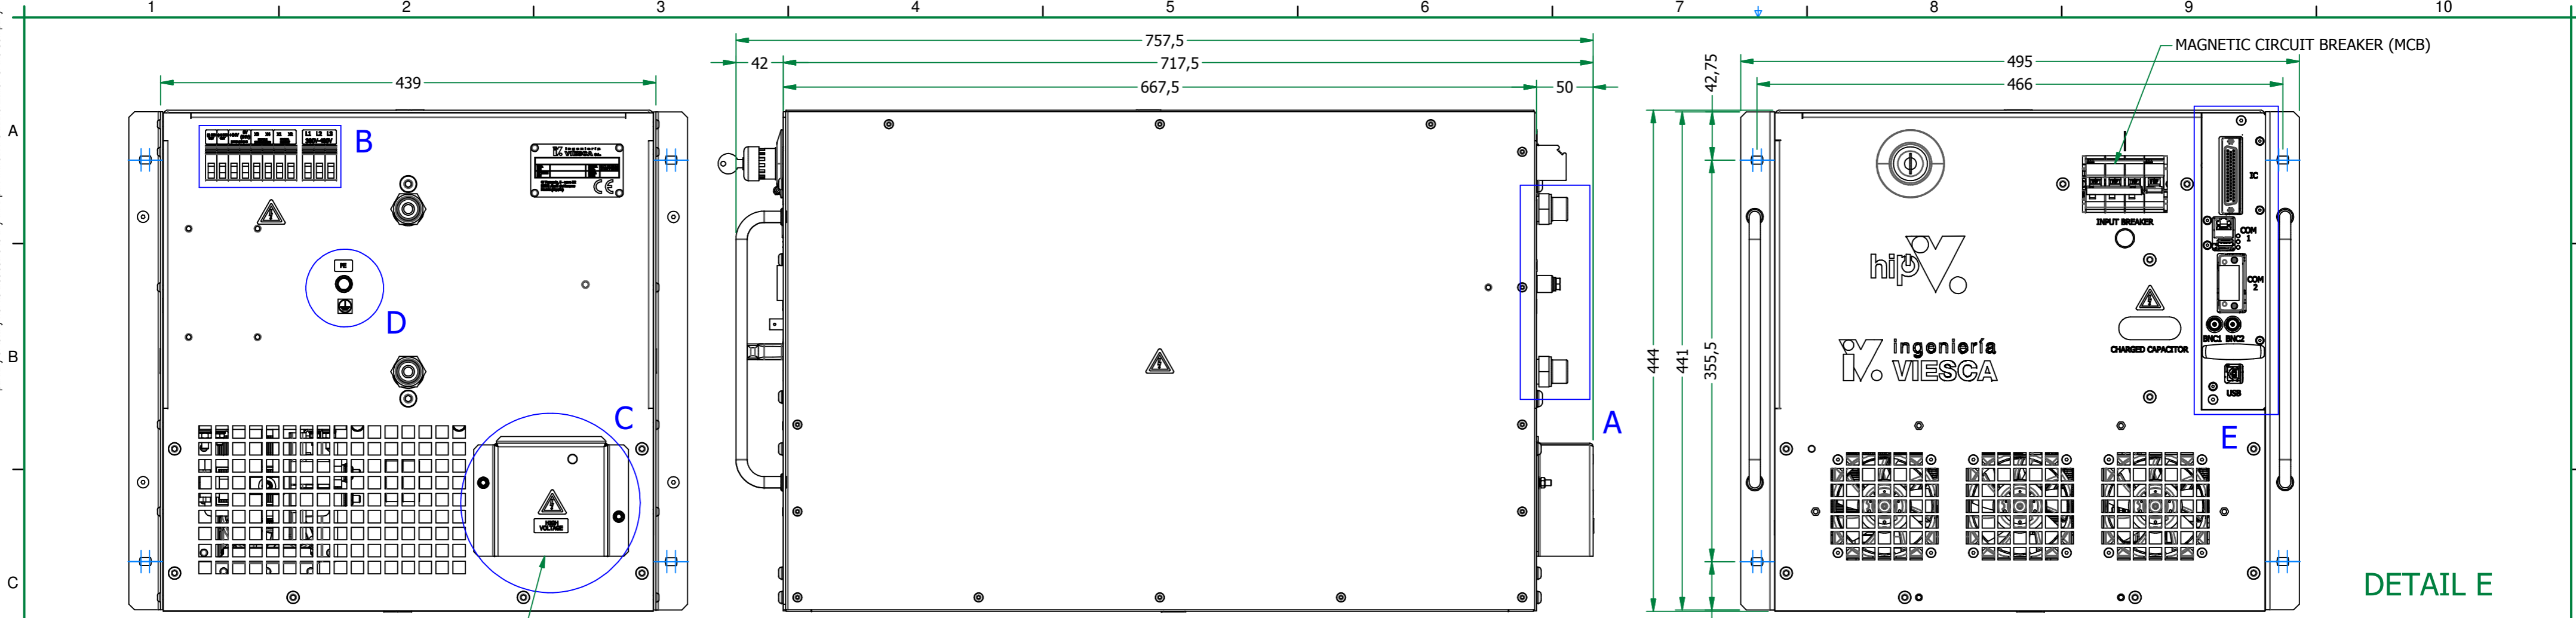




This document is property of INGENIERIA VIESCA, S. L., it is allowed neither its reproduction partially or totally nor its disclosure to any third part without the authorization of the Company.

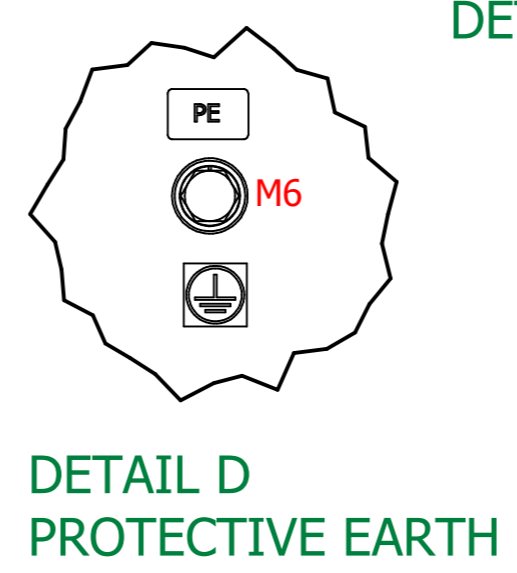



DETAIL B
INPUT TERMINALS

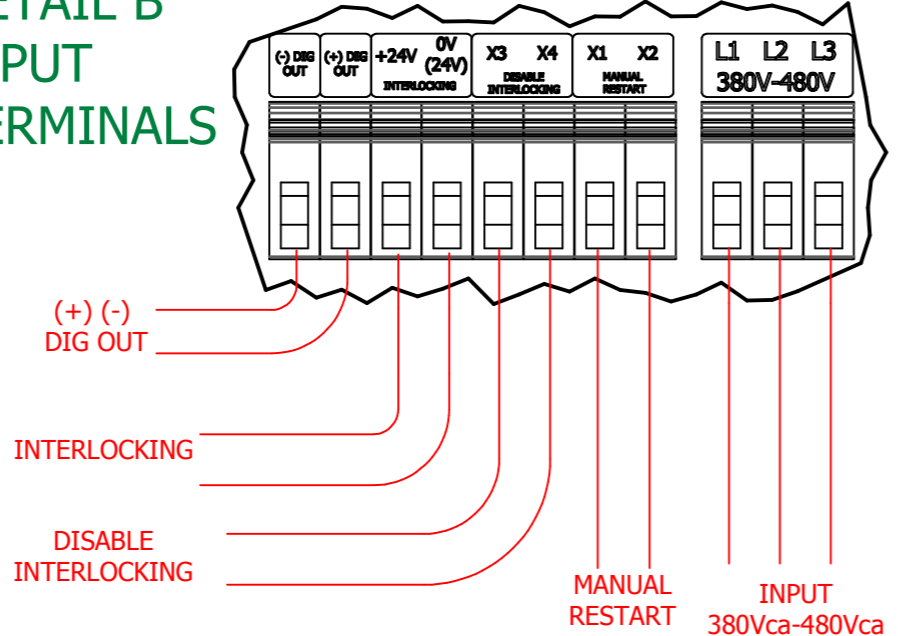


DETAIL A

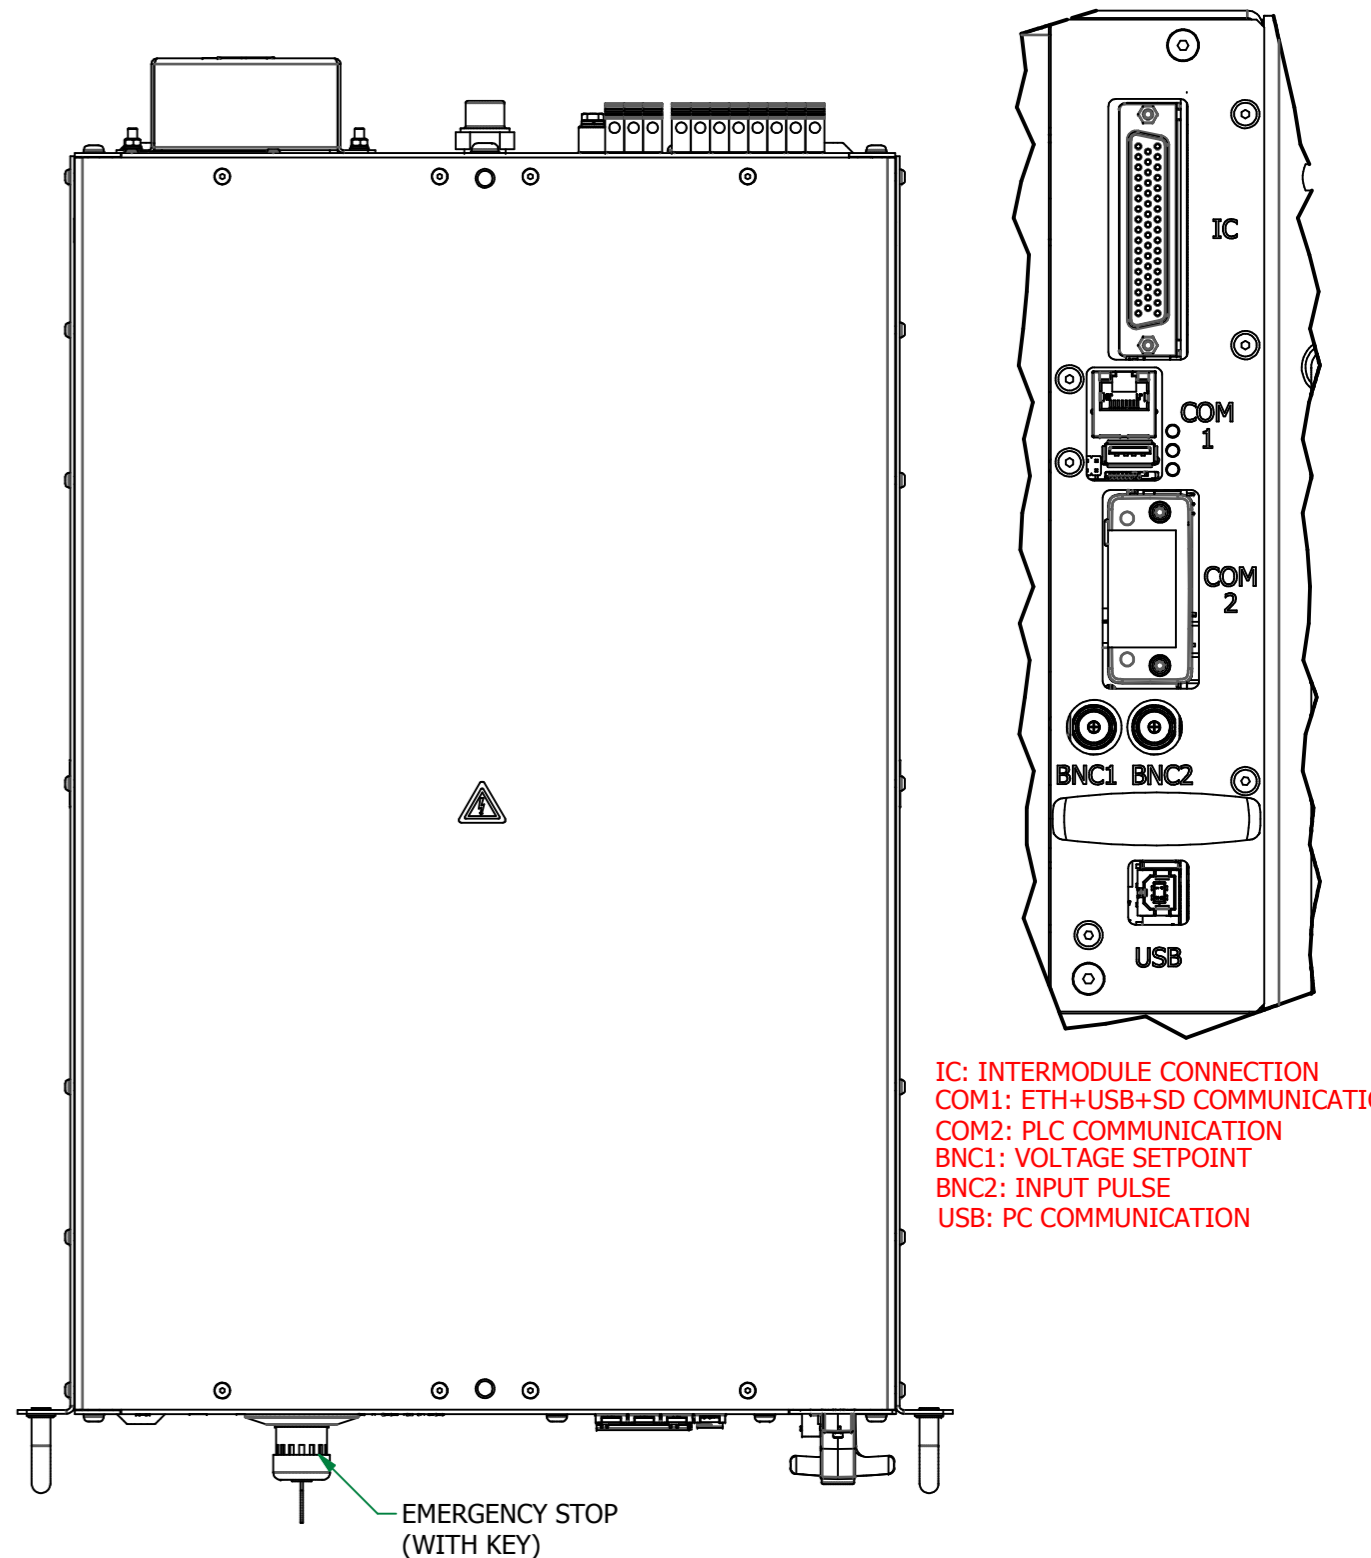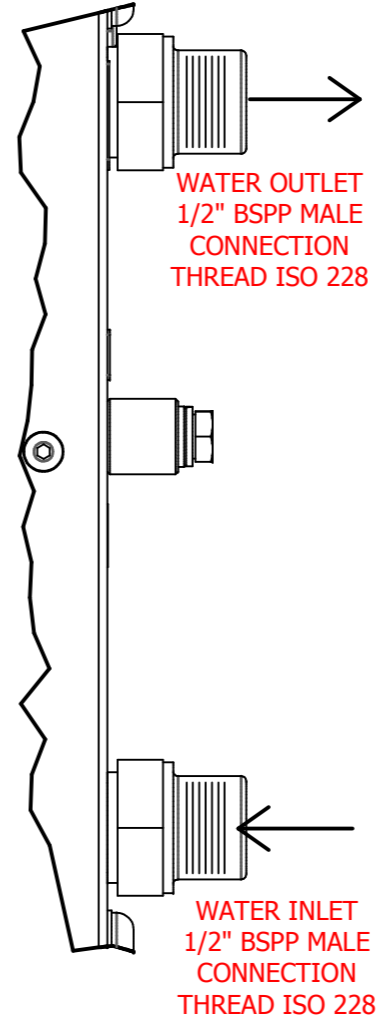

IC: INTERMODULE CONNECTION
COM1: ETH+USB+SD COMMUNICATION
COM2: PLC COMMUNICATION
BNC1: VOLTAGE SETPOINT
BNC2: INPUT PULSE
USB: PC COMMUNICATION

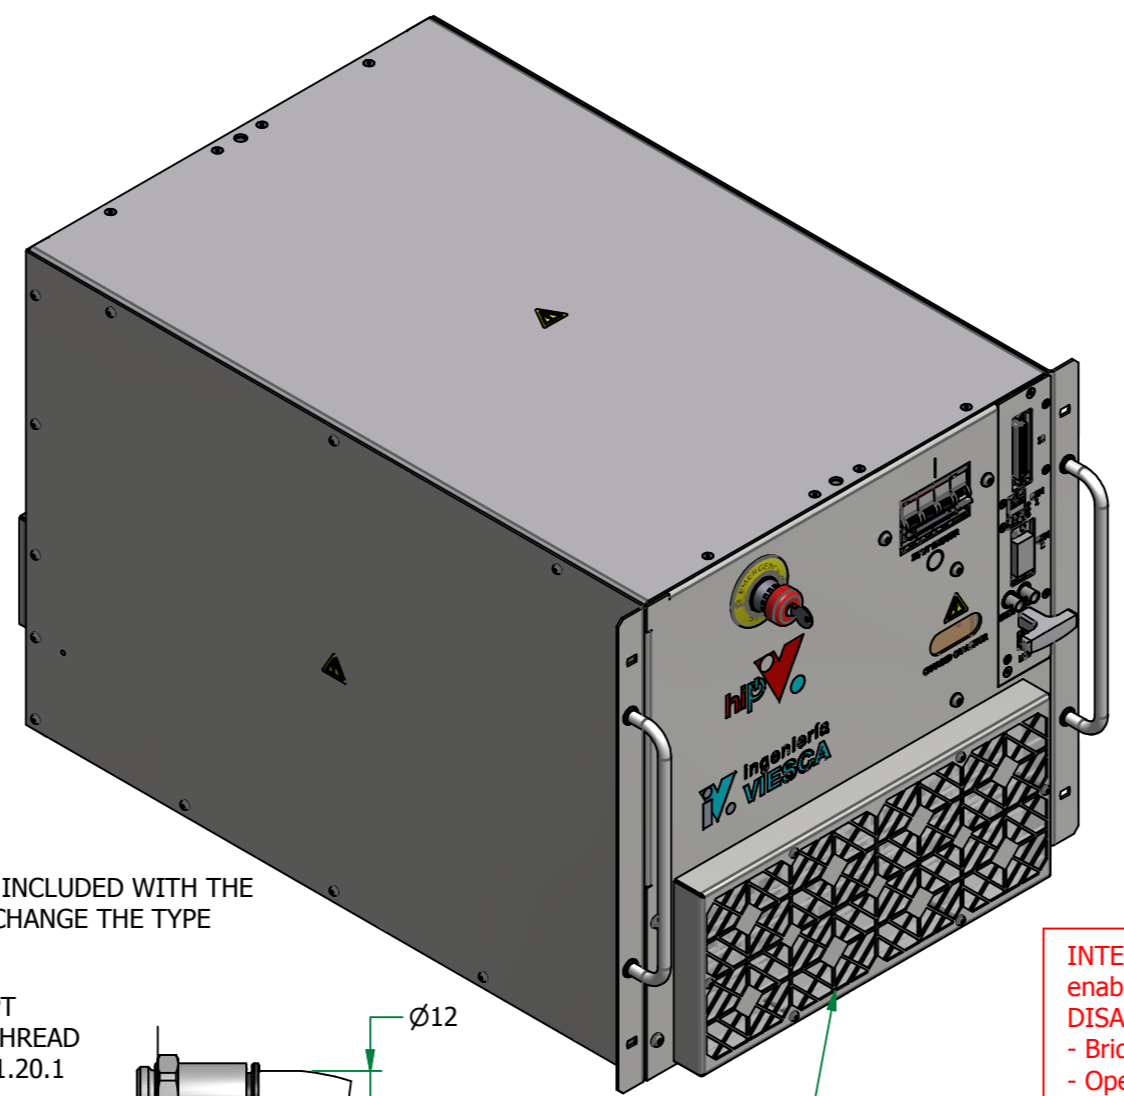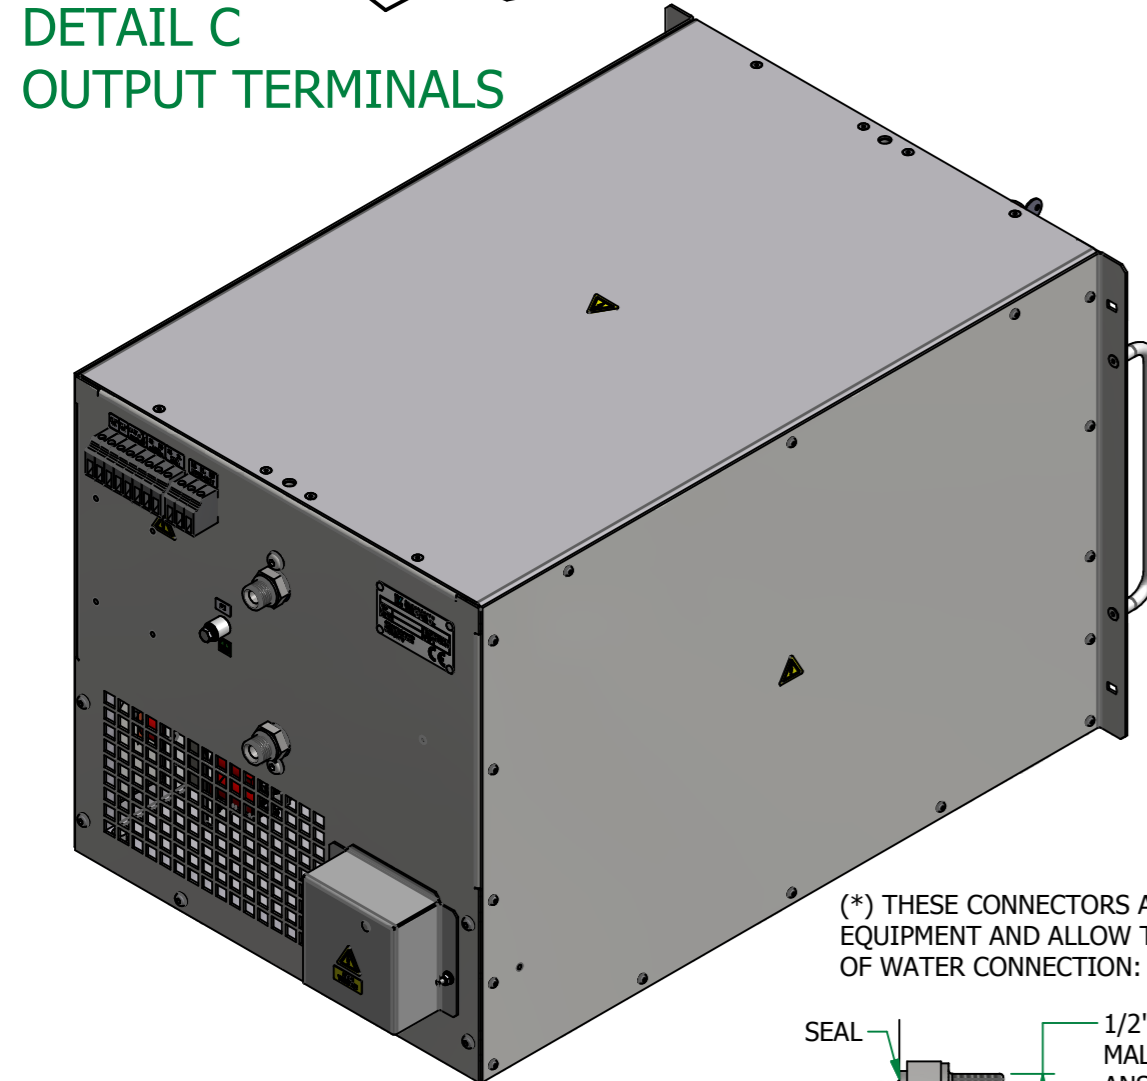

(*) THESE CONNECTORS ARE INCLUDED WITH THE EQUIPMENT AND ALLOW TO CHANGE THE TYPE OF WATER CONNECTION:

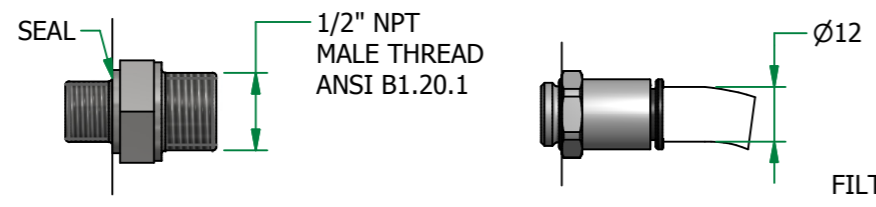

Heatsink Flow Rate	5 l/min	10 l/min	15 l/min
Pressure Drop	0,06 bar	0,22 bar	0,5 bar

INTERLOCKING: connected when interlocking enabled (+24V PS ON, 0V PS OFF)
DISABLE INTERLOCKING:
 - Bridge: Interlocking disabled
 - Open: Interlocking enabled
MANUAL RESTART:
 - Bridge: Manual restart from input breaker when 380-480Vac off
 - Open: No manual restart
DIG OUT: To be defined

2	Modificadas bornas de salida (pasa de M6 a M8). Modificado frontal	C.V.E.M.	R.L.P.	22-06-2020
ED.	DESCRIPCIÓN	APROBADO	MODIF. POR	FECHA

MATERIAL	ACABADO FINISH	PESO WEIGHT	TOL. MECANIZADO / MACHINING	HOJA Nº SHEET Nº	NºHOJAS NºSHEETS
-	-	103 kg	UNE-EN 22768-1-m TOL. SOLDADURAWELDING	1	1
DIBUJADO DRAWN	R.L.P.	FECHA CREACION / MODIF. DATE OF ISSUE	DENOMINACION TITLE	20 kW PULSED POWER SUPPLY 1200V-1500A	
COMPROBADO CHECKED	C.V.E.M.	22/06/2020	CODIGO CODE		
APROBADO APPROVED	C.V.E.M.	COTAS EN DIMENSION IN	020066	FORMATO SIZE FORMAT	A2
ESCALA SCALE			1:4	Nº DE PLANO DRAWING	P-005391
MODIFICACION ISSUE			0	1	2

Este documento es propiedad de INGENIERIA VIESCA, S. L., y no está permitida su reproducción total o parcial ni la cesión a terceros sin el consentimiento expreso de la dirección.